


NON-PENETRATING WARNING LINE

WL33



PRODUCT OVERVIEW

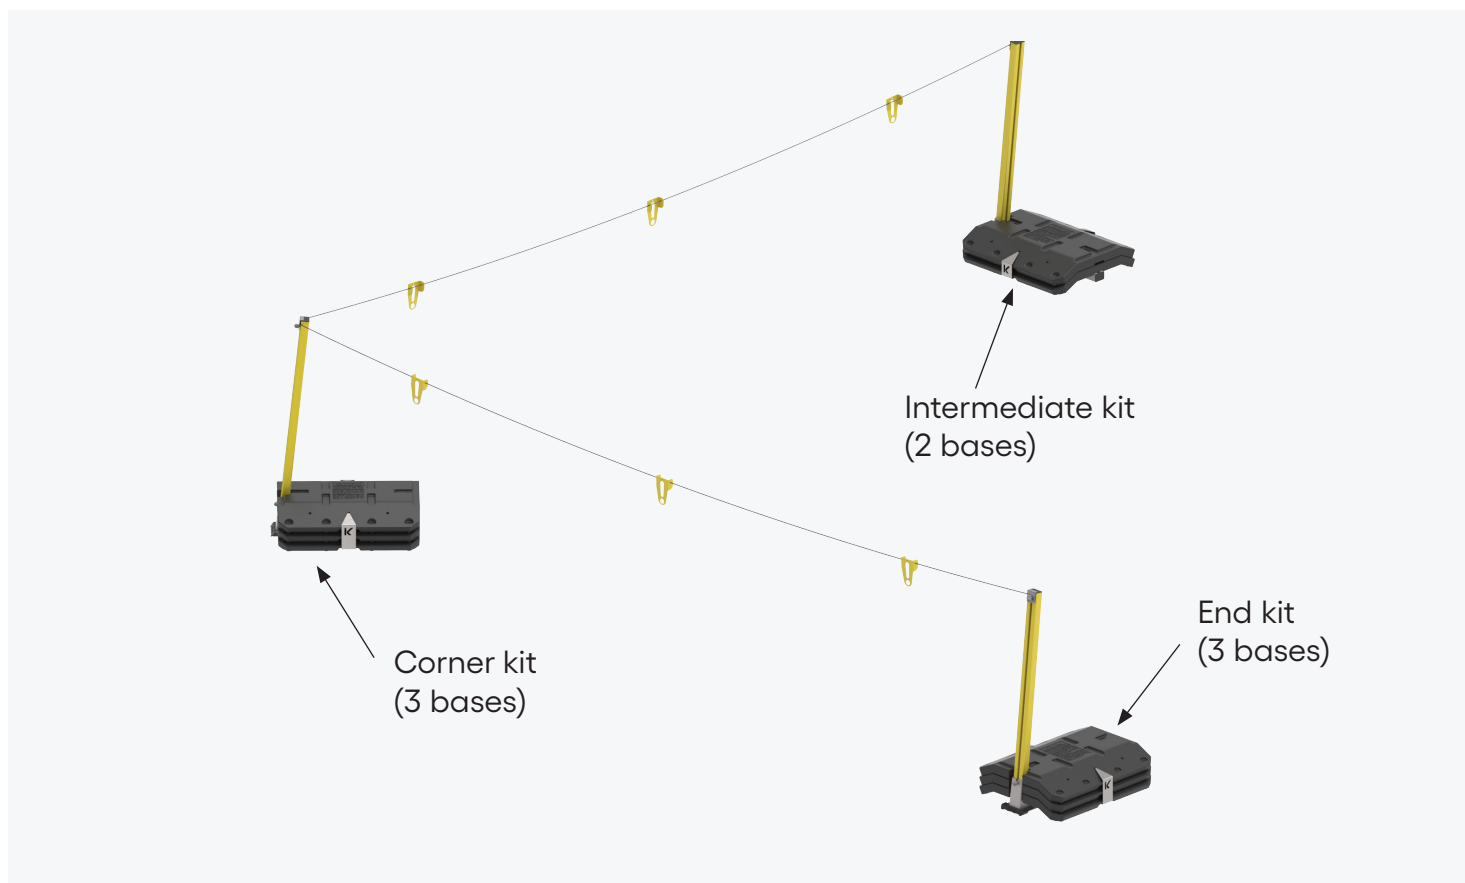

The **Kattsafe WL33 Non-Penetrating Warning Line** provides high visual warning of a fall hazard on membrane and built-up roofs. The aluminum posts are positioned every 25 feet (with the exception of corners and terminations/end kits positioned every 15ft) and connected with plastic coated stainless aircraft cable with aluminum danger pennants every 6ft. The 54lb bases and T-bolt fastening method ensure quicker setup, as well as safer, easier handling in the field.

Our WL33 Non-Penetrating Warning Line for membrane and built-up roofs, features a plastic coated concrete weighted base that is completely non-penetrating and sits on top of the roofing membrane. WL33 provides OSHA compliance and high visual awareness to ensure people are kept a safe distance from fall hazards.

Applications

- Visual warning line around roof perimeter
- Visual warning line around rooftop equipment, machinery, and other unprotected fall edges

Features

- Can be customized on-site to meet the required application
- Can be combined with Kattsafe guardrail systems to create an OSHA compliant roof
- OSHA compliant
- Posts supplied yellow as standard for increased visibility

TECHNICAL SPECIFICATION

Material

- Membrane protection under the base is provided for added safety.
- Cable: 1/8in galvanized aircraft cable, vinyl-coated with aluminum crimped termination sleeves.
- Flags: Aluminum sheet flags with a 'Warning' stamp, powder-coated in safety yellow for increased visibility.
- Flag Location: Flags are spaced every 6ft, with an aluminum sleeve to maintain evenly spaced intervals.

Finish

All aluminum sections are mill-type, free from sharp edges and snagging points

Compliance

WL33 is compliant with OSHA Code 1926.502(f)(2)(iii), designed to be erected a minimum of 6 feet from the roof edge. It can resist a horizontal force of at least 16lbs without tipping over.

Installation

The product mounts to a weighted base. The warning flags should be spaced every 6ft. From corners to end kits, use 15ft spacing. For all intermediates, use 25ft spacing

Installation

As per the standard company policy, the WL33 comes with a warranty period of 5 years from the date of installation, subject to proper installation, use, and maintenance as per the manufacturer's specifications. This excludes the weighted bases. Extended warranties could be available on a project basis.